

## INTERCHANGEABLE CEJN 320

One Way Shut-Off 

74 SCFM 



 **Type H-1**

**PLUG**  
(STEEL)

**AUTOMATIC  
COUPLER**  
(BRASS)





### FEMALE THREAD




	Part No.	Part No.
1/8" (F) NPT	23.1122	-
1/4" (F) NPT	23.1142	23.1442
3/8" (F) NPT	23.1162	23.1462
1/2" (F) NPT	23.1172	23.1472

### MALE THREAD



	Part No.	Part No.
1/8" (M) NPT	23.1222	-
1/4" (M) NPT	23.1242	23.1542
3/8" (M) NPT	23.1262	23.1562
1/2" (M) NPT	23.1272	23.1572

### HOSE BARB



	Part No.	Part No.
1/4" I.D.	23.1342	23.1642
5/16" I.D.	23.1352	23.1652
3/8" I.D.	23.1362	23.1662
1/2" I.D.	23.1372	23.1672

### Applications

- For construction work, mechanic, paint and body shops
- Offers a higher flow for maximum performance

### Features

- High impact resistance
- Interchangeable CEJN 320
- Very high flow performance
- Fully automatic
- High quality connection for heavy duty use
- Safety lip prevents accidental disconnection when dragged on the floor

### Specifications

**Maximum Working Pressure**  
500 PSI

**Working Temperature**  
-30°C to 100°C (-22°F to 212°F)

**Air Flow**  
74 SCFM

**Construction**  
Body : Nickel Plated Brass  
Locking Sleeve : Hardened Steel  
Seals : Nitrile  
Locking Balls and Springs : Stainless Steel

## ANTI-HOSE WHIP NIPPLE


### Applications

- For applications requiring maximum safety

### Features


- Special design that prevents against hose whips by exhausting air slowly when disconnecting
- Slow purge valve

### HOSE BARB



	Part No.
5/16" I.D.	23.1952
3/8" I.D.	23.1962
1/2" I.D.	23.1972

### PREVENTS DANGEROUS HOSE WHIPS

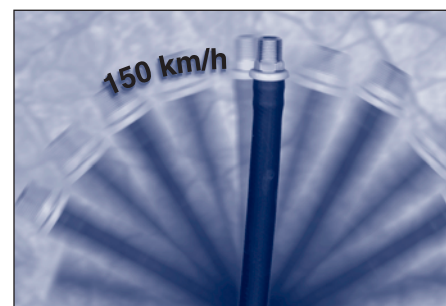

# Series 23


## Quick Couplers Type U-1 (1/4" Universal)



One Way Shut-Off



37 SCFM

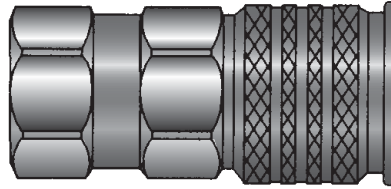

Type I-1



Type A-1



Type T-1

### Applications

- Ideal for : Construction work
- Mechanical shops
- Paint and body shops
- Industrial plants
- Vacuum applications

### Features

- Fully compatible with Industrial, Aro and Tru-Flate Types (I-1, A-1 and T-1)
- Fully automatic
- Single handed connection even under pressure

### Specifications

#### Maximum Working Pressure

250 PSI

#### Working Temperature

-40°C to 107°C (-40°F to 225°F)

#### Air Flow

With Aro Type plug : 25 SCFM

With Tru-Flate Type plug : 34 SCFM

With Industrial Type plug : 34 SCFM

#### Construction

Body : Brass


Locking Sleeve : Plated Steel

Seals : Buna-N

Locking Balls : Stainless Steel

**AUTOMATIC  
COUPLER  
(BRASS)**

#### FEMALE THREAD




**Part No.**

1/4" (F) NPT

23.2442

#### MALE THREAD



**Part No.**

1/4" (M) NPT

23.2542

**TYPE A-1  
(ARO)**



**TYPE I-1  
(INDUSTRIAL)**




**TYPE T-1  
(TRU-FLATE)**



**THE UNIVERSAL SOLUTION  
TO COMPATIBILITY CONFUSION**



**TYPE U-1  
(UNIVERSAL)**

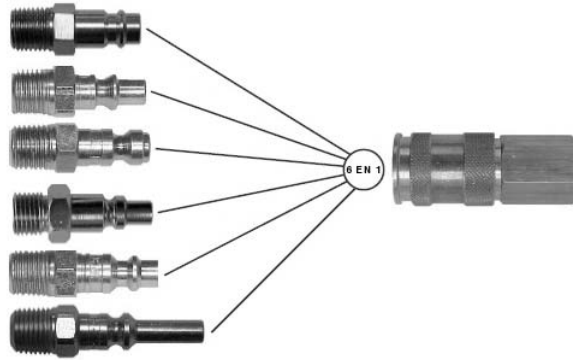

## Applications

- Ideal for : Construction work  
                   Mechanical shops  
                   Paint and body shops  
                   Industrial plants  
                   Vacuum applications

## Features

- Fully compatible with Industrial, Aro and High-Flow Types (I-1, A-1 and H-1)
- Fully automatic
- Single handed connection even under pressure

## Specifications

**Maximum Working Pressure**  
 250 PSI


**Working Temperature**  
 -40°C to 107°C (-40°F to 225°F)

**Air Flow**  
 With Aro Type plug : 25 SCFM  
 With High-Flow Type plug : 74 SCFM  
 With Industrial Type plug : 34 SCFM

**Construction**  
 Body : Brass  
 Locking Sleeve : Plated Steel  
 Seals : Buna-N  
 Locking Balls : Stainless Steel


**AUTOMATIC  
 COUPLER  
 (BRASS)**

### FEMALE THREAD



	Part No.
1/4" (F) NPT	23.2642
3/8" (F) NPT	23.2662

### MALE THREAD



	Part No.
1/4" (M) NPT	23.2742
3/8" (M) NPT	23.2762

**For any questions  
 or information about  
 compressed air  
 you may contact us at  
 Tel. : 1-888-730-0501  
 Fax : 1-888-730-3522  
 or visit our web site at  
[www.airmax.ca](http://www.airmax.ca)**

One Way Shut-Off 



### Applications

- Ideal for construction work, mechanical and body shops
- Ideal for air tools requiring very high air flow

### Features

- Safety design to prevent dangerous hose whips
- Safety valve releases air pressure when disconnecting
- Unrestricted flow with ball type valve
- Full bore design allowing very high flow
- Fully automatic

### Specifications

#### Maximum Working Pressure

250 PSI

#### Working Temperature

-40°C to 93°C (-40°F to 200°F)

#### Air Flow

Type I-2 (3/8") : 95 SCFM

Type I-3 (1/2") : 150 SCFM

#### Construction

Body and Locking Sleeve :

Chromium Plated Steel

Seals : Buna N


INTERCHANGEABLE I-2, I-3 TYPES (3/8" AND 1/2" INDUSTRIAL)

95 SCFM 

150 SCFM 



Type I-2

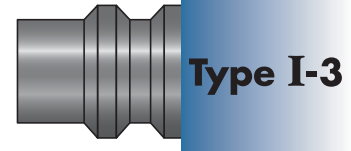

Type I-3

**AUTOMATIC COUPLER**  
**(3/8" INDUSTRIAL)**

**AUTOMATIC COUPLER**  
**(1/2" INDUSTRIAL)**

### FEMALE THREAD



3/8" (F) NPT  
1/2" (F) NPT  
3/4" (F) NPT

**Part No.**

23.5462  
23.5472  
-

**Part No.**

-  
23.6472  
23.6482

### MALE THREAD



3/8" (M) NPT  
1/2" (M) NPT  
3/4" (M) NPT

**Part No.**

23.5562  
23.5572  
-

**Part No.**

-  
23.6572  
23.6582

### HOSE BARB



3/8" I.D.  
1/2" I.D.  
3/4" I.D.


**Part No.**

23.5662  
23.5672  
-


**Part No.**

23.6662  
23.6672  
23.6682

**Safety design** - Releases internal pressure before disconnecting

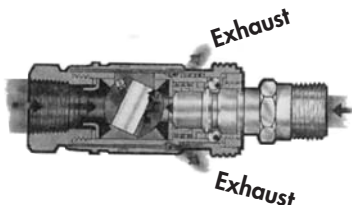

**Full bore design**

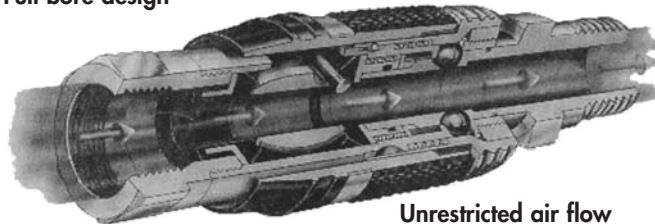

Unrestricted air flow