


100-FT SELF-STORING NYLON HOSE WITHOUT FITTING



Part No.	Hose I.D. in.	Maximum Working Pressure
46.1400	1/4	250 PSI
46.1600	3/8	200 PSI
46.1700	1/2	150 PSI
46.1800	3/4	125 PSI

COLOUR : RED



Applications

- For compressed air, gas, water or vacuum
- For assembly lines, workstations, automotive maintenance shops and construction sites

Features

- Light and flexible for maximum safety at workstation
- First quality nylon
- Accrued resistance to abrasion


Specifications

Maximum Working Pressure
250 PSI

Working Temperature
-51°C to 93°C (-60°F to 200°F)

Construction
Material : Nylon 12
Colour : Red


SELF-STORING NYLON HOSE ASSEMBLY WITH SWIVEL FITTINGS

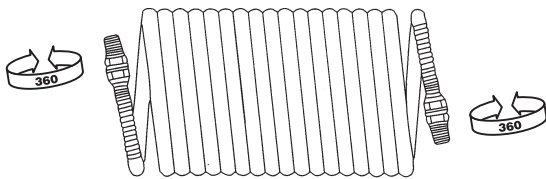

Part No.	Hose I.D. in.	Overall Length ft	Reusable Swivel Fittings
46.2412	1/4	12.5	1/4 (M) NPT
46.2425	1/4	25	1/4 (M) NPT
46.2450	1/4	50	1/4 (M) NPT
46.2612	3/8	12.5	3/8 (M) NPT
46.2616	3/8	12.5	1/4 (M) NPT
46.2625	3/8	25	3/8 (M) NPT
46.2626	3/8	25	1/4 (M) NPT
46.2650	3/8	50	3/8 (M) NPT
46.2651	3/8	50	1/4 (M) NPT
46.2712	1/2	12.5	1/2 (M) NPT
46.2725	1/2	25	1/2 (M) NPT
46.2750	1/2	50	1/2 (M) NPT
46.2812	3/4	12.5	3/4 (M) NPT
46.2825	3/4	25	3/4 (M) NPT
46.2850	3/4	50	3/4 (M) NPT


REUSABLE BRASS SWIVEL FITTINGS

Part No.	Hose I.D. in.	Reusable Swivel Fittings
46.3144	1/4	1/4 (M) NPT
46.3164	3/8	1/4 (M) NPT
46.3166	3/8	3/8 (M) NPT
46.3177	1/2	1/2 (M) NPT
46.3188	3/4	3/4 (M) NPT

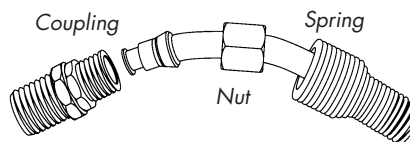

Features

- Full flow male swivel fitting
- Easy to assemble
- Spring guard to avoid twisting and kinking

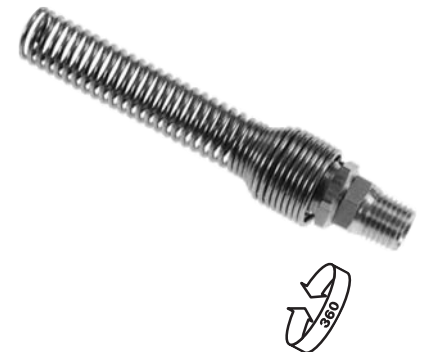

BLUE, TRANSPARENT BLUE AND RED



Applications

- Ideal for compressed air, hydraulics, gas, water, and vacuum
- For assembly lines, paint shops, production equipment, workstations, automotive maintenance shops and construction sites

Features

- Excellent recoil memory and kink resistance
- Light and flexible for maximum safety and ergonomcy at the workstation
- Oil and abrasion resistant
- Swivel fittings mounted at each end
- 4" and 20" tails

Specifications

Maximum Working Pressure

125 PSI

Working Temperature

-40°C to 77°C (-40°F to 170°F)


Material

Polyurethane

Colours

Blue, Transparent Blue, and Red

4" AND 20" TAILS

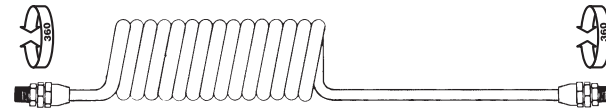

125 PSI

1/4" I.D. HOSE – ASSEMBLY WITH SWIVEL FITTINGS

BLUE WITH SLEEVE Part No.	RED Part No.	Overall Length ft	Reusable Swivel Fittings
46.4415	46.6415	15	1/4 (M) NPT
46.4420	46.6420	20	1/4 (M) NPT
46.4425	46.6425	25	1/4 (M) NPT
46.4430	46.6430	30	1/4 (M) NPT
46.4450	46.6450	50	1/4 (M) NPT

5/16" I.D. HOSE – ASSEMBLY WITH SWIVEL FITTINGS

BLUE WITH SLEEVE Part No.	Overall Length ft	Reusable Swivel Fittings
46.4515	15	1/4 (M) NPT
46.4520	20	1/4 (M) NPT
46.4525	25	1/4 (M) NPT
46.4530	30	1/4 (M) NPT
46.4550	50	1/4 (M) NPT

3/8" I.D. HOSE – ASSEMBLY WITH SWIVEL FITTINGS

BLUE WITH SLEEVE Part No.	RED Part No.	Overall Length ft	Reusable Swivel Fittings
46.4615		15	3/8 (M) NPT
46.4616		15	1/4 (M) NPT
46.4620		20	3/8 (M) NPT
46.4621		20	1/4 (M) NPT
46.4625	46.6625	25	3/8 (M) NPT
46.4626	46.6626	25	1/4 (M) NPT
46.4630		30	3/8 (M) NPT
46.4631		30	1/4 (M) NPT
46.4650	46.6650	50	3/8 (M) NPT
46.4651	46.6651	50	1/4 (M) NPT

1/2" I.D. HOSE – ASSEMBLY WITH SWIVEL FITTINGS

BLUE Part No.	Overall Length ft	Reusable Swivel Fittings
46.4660	15	1/2 (M) NPT
46.4665	20	1/2 (M) NPT
46.4670	25	1/2 (M) NPT
46.4675	30	1/2 (M) NPT
46.4680	50	1/2 (M) NPT

REUSABLE BRASS SWIVEL FITTINGS

Features

- Full flow male swivel fitting
- Easy to install
- Pre-coated with Teflon

Part No.	Hose I.D. in.	Reusable Swivel Fittings
46.9145	1/4	1/4 (M) NPT
46.9154	5/16	1/4 (M) NPT
46.9164	3/8	1/4 (M) NPT
46.9166	3/8	3/8 (M) NPT
46.9177	1/2	1/2 (M) NPT



Maximum performance and ergonomy

4" AND 60" TAILS

1/4" I.D. HOSE – WITH SWIVEL FITTINGS

210 PSI

Part No.	Overall Length ft	Reusable Swivel Fittings
46.7410	10	1/4 (M) NPT
46.7415	15	1/4 (M) NPT
46.7420	20	1/4 (M) NPT
46.7425	25	1/4 (M) NPT
46.7430	30	1/4 (M) NPT

5/16" I.D. HOSE – WITH SWIVEL FITTINGS

185 PSI

Part No.	Overall Length ft	Reusable Swivel Fittings
46.7510	10	1/4 (M) NPT
46.7515	15	1/4 (M) NPT
46.7520	20	1/4 (M) NPT
46.7525	25	1/4 (M) NPT
46.7530	30	1/4 (M) NPT

3/8" I.D. HOSE – WITH SWIVEL FITTINGS

165 PSI

Part No.	Overall Length ft	Reusable Swivel Fittings
46.7610	10	3/8 (M) NPT
46.7611	10	1/4 (M) NPT
46.7615	15	3/8 (M) NPT
46.7616	15	1/4 (M) NPT
46.7620	20	3/8 (M) NPT
46.7621	20	1/4 (M) NPT
46.7625	25	3/8 (M) NPT
46.7626	25	1/4 (M) NPT
46.7630	30	3/8 (M) NPT
46.7631	30	1/4 (M) NPT

REUSABLE BRASS SWIVEL FITTINGS



Features

- Full flow male swivel fitting
- Easy to install
- Pre-coated with Teflon

Part No.	Hose I.D. in.	Reusable Swivel Fittings
46.9145	1/4	1/4 (M) NPT
46.9154	5/16	1/4 (M) NPT
46.9164	3/8	1/4 (M) NPT
46.9166	3/8	3/8 (M) NPT
46.9177	1/2	1/2 (M) NPT

TRANSPARENT BLUE



Applications

- For compressed air, gas, water, and vacuum
- Ideal for construction work or repair shops
- For assembly lines, paint shops, production equipment, workstations, and automotive maintenance shops

Features

- New advanced generation of polyurethane self-storing hoses
- 60 inch tail for better handling
- Excellent recoil memory
- Increased resistance to moisture, lubricant and grease
- Flexible and light for workstation maximum ergonomy and safety
- Reusable swivel fittings mounted each end
- Working pressure capabilities are increased with the addition of a tough Dacron polyester inner braid reinforcement
- UV stabilized for longer outdoor exposure life
- Extremely resistant to abrasion and flexible even in sub-zero temperatures

Specifications

Maximum Working Pressure

@ 24°C (75°F)

1/4" I.D. : 210 PSI

5/16" I.D. : 185 PSI

3/8" I.D. : 165 PSI

Working Temperature

-40°C to 74°C (-40°F to 165°F)

Overall Diameter

1/4" I.D. : 3/8" O.D.

5/16" I.D. : .473" O.D.

3/8" I.D. : 9/16" O.D.

Material

Reinforced Polyurethane

Colour

Transparent Blue



Applications

- For handling equipment, robotics, and production equipments
- Ideal for automotive industry, OEM, assembly or packaging lines and vacuum handling

Features

- Superior quality polyurethane hoses
- Offered in twin, triple, quad, six and eight tube combinations
- Choose between a jacketed bundle or simply welded together
- Multiple colours for easy identification


Informations needed when placing your order :

Quantity of tubes and length
Overall and interior diameters
Colours and sequence

AVAILABLE UPON REQUEST ACCORDING TO YOUR SPECIFICATIONS



TUBING

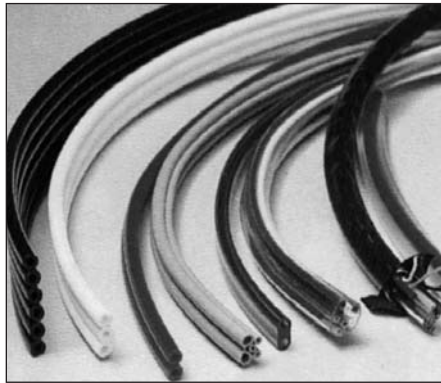


RETRACTABLE SELF-STORING HOSES (WELDED)



Multiple Combinations

Twin OO	Triple OOO
Quadruple OOOO	Triple OOO
6 Tubes OOOOOO	8 Tubes OOOOOOOO

FLEXIBLE PVC JACKET

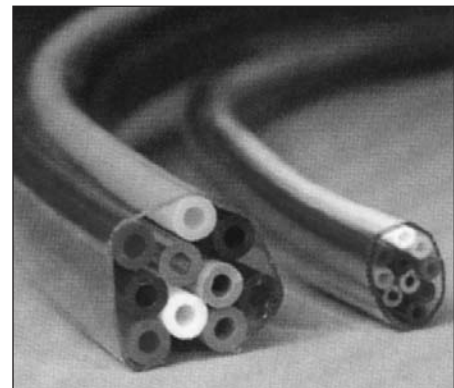

ENDLESS COMBINATIONS TO FIT YOUR NEEDS

