


Light Blue



*Very light and flexible, abrasion resistant*

REEL



Part No.	Length ft	Hose I.D. in.	Hose O.D. in.	Maximum Working Pressure
50.1400	500	1/4	1/2	300 PSI
50.1500	500	5/16	5/8	300 PSI
50.1600	500	3/8	5/8	300 PSI
50.1700	500	1/2	13/16	300 PSI

Applications

- Ideal for air tools, pneumatic equipment, or water
- For indoor use requiring maximum lightness and ergonomy

Features

- Ergonomic and strong
- Very light and flexible
- Easy to clean wall, resistant to abrasion and ozone effects
- Non-marking outside cover

Specifications

Working Temperature

-26°C to 65°C (-15°F to 150°F)

Construction

Cover : Blue Thermoplastic PVC

Tube : Black PVC

Reinforcement : Spiraled Polyester Fibers

Colour

Light Blue

Recommended Fittings

Hose Barbs (Series 33)

Hose Clamps (Series 39)




Recommended fittings

HOSE ASSEMBLY WITH FITTINGS



Part No.				Hose I.D. in.	Fittings (M) NPT in.	Maximum Working Pressure
25'	35'	50'	100'			
50.1425	50.1435	50.1450	50.1490	1/4	1/4	300 PSI
50.1525	50.1535	50.1550	50.1590	5/16	1/4	300 PSI
50.1625	50.1635	50.1650	50.1690	3/8	3/8	300 PSI
50.1626	50.1636	50.1656	50.1696	3/8	1/4	300 PSI
50.1725	50.1735	50.1750	50.1790	1/2	1/2	300 PSI
50.1726	50.1736	50.1756	50.1796	1/2	3/8	300 PSI

IDEAL FOR AIR TOOLS


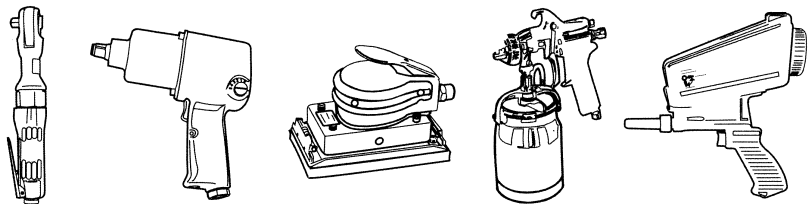


**For any questions  
 or information about  
 compressed air  
 you may contact us at  
 Tel. : 1-888-730-0501  
 Fax : 1-888-730-3522  
 or visit our web site at  
[www.airmax.ca](http://www.airmax.ca)**

### Reinforced polyester PVC hose

FDA Compliant Transparent

#### REEL

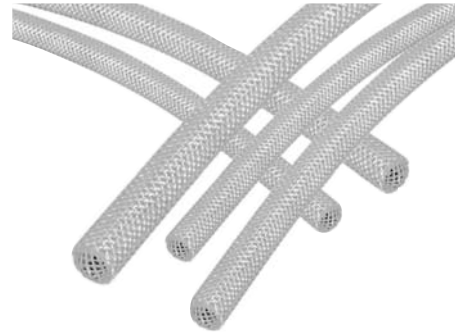

Part No.	Length ft	Hose I.D. in.	Hose O.D. in.	Maximum Working Pressure @70°F (PSI)
50.2000	300	1/8	0.328	250
50.2100	300	3/16	0.406	250
50.2200	300	1/4	0.438	250
50.2210	500	1/4	0.438	250
50.2300	300	5/16	0.531	250
20.2400	300	3/8	0.594	225
50.2410	500	3/8	0.594	225
50.2500	300	1/2	0.750	200
50.2510	500	1/2	0.750	200
50.2600	200	5/8	0.891	200
50.2700	200	3/4	1.031	150
50.2800	200	1	1.300	125
50.2850	100	1 1/4	1.620	100
50.2900	50	1 1/2	1.938	100
50.2901	100	1 1/2	1.938	100
50.2950	50	2	2.490	75
50.2951	100	2	2.490	75

#### Applications

- Multi-purpose hose, ideal for manufacturing equipment, water, lubrication, packaging machines, lines in the beverage and food processing industry (FDA) and for the plastic molding industry

#### Features

- FDA compliant
- Lightweight and flexible
- Easy to clean transparent body
- Good resistance to ozone and most chemical products
- Reinforced with a spiraled polyester yarn

#### Specifications

##### Working Temperature

-4°C to 65°C (25°F to 150°F)

##### Construction

Tube : Clear Thermoplastic PVC  
Reinforcement : Spiraled Polyester Yarn

##### Colour

Transparent

##### Recommended Fittings


Hose Barbs with Ferrules (Series 33) and Hose Clamps (Series 39)

### HOSE ASSEMBLY WITH FITTINGS



Part No.				Hose I.D. in.	Fittings (M) NPT in.	Maximum Working Pressure
25'	35'	50'	100'			
50.2225	50.2235	50.2250	50.2290	1/4	1/4	250 PSI
50.2325	50.2335	50.2350	50.2390	5/16	1/4	250 PSI
50.2425	50.2435	50.2450	50.2490	3/8	3/8	225 PSI
50.2426	50.2436	50.2456	50.2496	3/8	1/4	225 PSI
50.2525	50.2535	50.2550	50.2590	1/2	1/2	200 PSI
50.2526	50.2536	50.2556	50.2596	1/2	3/8	200 PSI

### IDEAL FOR PLASTIC MOLDS

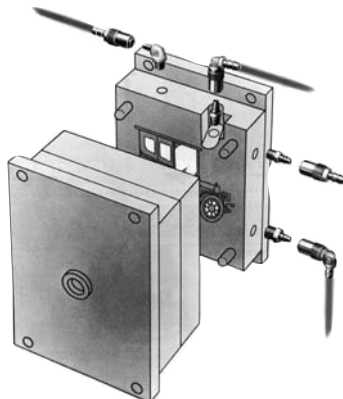


Recommended fittings

Dark Blue



Ergonomic, 50% lighter than rubber

REEL



Part No.	Length ft	Hose I.D. in.	Hose O.D. in.	Maximum Working Pressure
50.3400	500	1/4	.395	250 PSI
50.3600	500	3/8	.535	250 PSI
50.3700	500	1/2	.688	250 PSI

Applications

- Ideal for air tools, stapling and nailing, for body shops and paint equipment, for assembly lines and construction
- For applications where maximum lightness and ergonomics are required

Features

- Ergonomic, 50% lighter than rubber
- Very flexible, even at cold temperature
- Easy to clean, oil and solvent resistant body
- Excellent resistance to abrasion and ozone
- Long-lasting, superior cut resistance
- Reusable teflon coated fittings

Specifications

**Maximum Working Pressure**  
250 PSI @ 70°F

**Working Temperature**  
-40°C to 85°C (-40°F to 185°F)

**Construction**  
Cover and Tube : Esther Base Polyurethane  
Reinforcement : High Tensile Strength Synthetic Yarn

**Colour**  
Dark Blue

HOSE ASSEMBLY WITH SWIVEL FITTINGS REUSABLE




Part No.						Hose I.D. in.	Fittings (M) NPT in.	Maximum Working Pressure
15'	25'	35'	50'	75'	100'			
50.3715	50.3725	50.3735	50.3750	50.3775	50.3790	1/2	1/2	250 PSI

HOSE ASSEMBLY WITH SWIVEL FITTINGS AND FERRULES



Part No.						Hose I.D. in.	Fittings (M) NPT in.	Maximum Working Pressure
15'	25'	35'	50'	75'	100'			
50.3415	50.3425	50.3435	50.3450	50.3475	50.3490	1/4	1/4	250 PSI
50.3615	50.3625	50.3635	50.3650	50.3675	50.3690	3/8	3/8	250 PSI
50.3616	50.3626	50.3636	50.3656	50.3676	50.3696	3/8	1/4	250 PSI

IDEAL FOR AIR TOOLS USED IN CONSTRUCTION

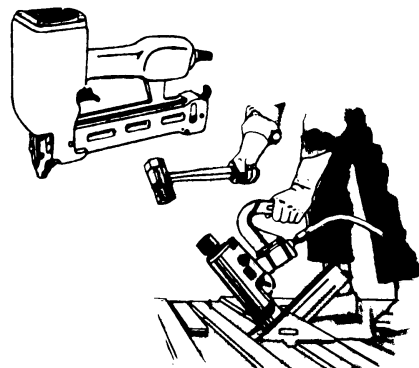

### ULTRA-FLEX NEW HI-TECH HOSE - POLYURETHANE EIGHTRON



**200 PSI**



**VERY FLEXIBLE  
AT LOW TEMPERATURES**

#### ULTRA-FLEX HOSE REEL



PART NO. Description

50.4000 1/4" I.D. (6.5 mm) X 10 mm O.D. X 300'

#### HOSE ASSEMBLY WITH SWIVEL FITTINGS

PART NO. Description

50.4025 1/4" I.D. X 25' X 1/4" (M) NPT

50.4035 1/4" I.D. X 35' X 1/4" (M) NPT

50.4050 1/4" I.D. X 50' X 1/4" (M) NPT

50.4075 1/4" I.D. X 75' X 1/4" (M) NPT

50.4090 1/4" I.D. X 100' X 1/4" (M) NPT



**HIGH QUALITY POLYURETHANE**

**ULTRA-LIGHTWEIGHT**

**GOOD ABRASION RESISTANCE**

**VERY ERGONOMIC**

**REINFORCED NYLON POLYURETHANE HOSE**

#### ACCESSORIES

50.4304



**For any questions  
or information about  
compressed air  
you may contact us at  
Tel. : 1-888-730-0501  
Fax : 1-888-730-3522  
or visit our web site at  
[www.airmax.ca](http://www.airmax.ca)**

**ULTRA-FLEX HOSE**

**REEL**



Part No.	Length ft	Hose I.D. in.	Hose O.D. in.	Maximum Working Pressure
50.4100	500	1/4	.500	300 PSI
50.4200	500	3/8	.625	300 PSI

**HOSE ASSEMBLY WITH FITTINGS**



15'	25'	35'	50'	75'	100'	Hose I.D. in.	Fittings (M) NPT in.	Maximum Working Pressure
50.4115	50.4125	50.4135	50.4150	50.4175	50.4190	1/4	1/4	300 PSI
50.4215	50.4225	50.4235	50.4250	50.4275	50.4290	3/8	1/4	300 PSI
	50.4226	50.4236	50.4251	50.4276	50.4291	3/8	3/8	300 PSI



**Applications**

- Outdoor air and water hose for use in cold weather, where flexibility is required.
- Ideal for in-plant applications that require very easy handling in tight workspaces.
- In-plant freezer applications requiring air or water service.
- A versatile, lightweight multi-function hose for air, water or mild chemical use.

**Features**

- Excellent low temperature flexibility
- Extremely easy to handle, even in cold weather where other PVC hoses become stiff
- Excellent abrasion resistance
- Resilient material avoids permanent deformation caused by stresses
- Medium Class B oil resistance
- Light weight
- Silicone-free materials


**Specifications**

**Construction**

*PVC reinforce with polyester.*

*Ergonomic, 50% lighter than rubber*

### REEL



Part No.	Length ft	Hose I.D. in.	Hose O.D. in.	Maximum Working Pressure
50.4400	500	1/4	.395	250 PSI
50.4600	500	3/8	.535	250 PSI
50.4700	500	1/2	.688	250 PSI



### FDA Compliant Transparent Blue

### Applications

- Ideal for transferring liquids under severe conditions, air and fuel lines, robotics, lubrication lines, pneumatic pumps, and high tech industrial equipment
- For construction, industrial work, food processing and agriculture

### HOSE ASSEMBLY WITH SWIVEL FITTINGS



Part No.						Hose I.D. in.	Fittings (M) NPT in.	Maximum Working Pressure
15'	25'	35'	50'	75'	100'			
50.4415	50.4425	50.4435	50.4450	50.4475	50.4490	1/4	1/4	250 PSI
50.4615	50.4625	50.4635	50.4650	50.4675	50.4690	3/8	3/8	250 PSI
50.4616	50.4626	50.4636	50.4656	50.4676	50.4696	3/8	1/4	250 PSI
50.4715	50.4725	50.4735	50.4750	50.4775	50.4790	1/2	1/2	250 PSI

### Features

- FDA approved
- High tech hose
- Ergonomic, flexible and lightweight
- Transparent cover easy to clean and resistant to oil and solvents
- Excellent resistance to abrasion and ozone
- Long lasting, superior cut resistance
- Reusable coated Teflon fittings

### Specifications

#### Maximum Working Pressure

250 PSI @ 70°F

#### Working Temperature

-40°C to 85°C (-40°F to 185°F)

#### Construction

Cover and Tube : Clear Ester Based

Polyurethane Reinforcement :

High Tensile Strength Synthetic Yarn

#### Colour

Transparent Blue

### IDEAL FOR THE FOOD PROCESSING INDUSTRY

