

*Ergonomics improves productivity*

**LIGHTWEIGHT TOOL BALANCER 1-8 LBS**



Part No.	Part No.	Weight capacity lbs	Cable length ft.
No ratchet	ratchet lock		
51.1202	-	1 - 2	5.2
51.1203	-	1 - 2	10.0
51.1204	-	2 - 4	5.2
51.1206	51.2206	4 - 6	6.6
51.1208	51.2208	6 - 8	6.6

**Features**

- Industrial quality durable steel cable
- Easy tension adjustment
- Nylon coated steel cable for smooth and long lasting performance
- Convenient 360° swivel and clevis pin hanger for easy mounting
- Ratchet lock for models (51.2206, 51.2208)
- High-impact molded nylon composite case
- To be used with secondary support chain model A for 51.1202 and 51.1204, and model B for others



**STANDARD DUTY TOOL BALANCER 6-24 LBS**

Part No.	Part No.	Weight capacity lbs	Cable length ft.
No ratchet	ratchet lock		
51.1309	51.2309	6 - 9	6.6
51.1313	51.2313	9 - 13	6.6
51.1318	51.2318	13 - 18	6.6
51.1324	51.2324	18 - 24	6.6



**Features**

- Durable steel cable provides smooth operation
- Load is secured by automatic drum lock even if tension drops suddenly
- Convenient 360° swivel and clevis pin hanger for easy mounting
- High-impact molded nylon composite case
- Optional ratchet lock allows cable locking at desired position
- Use secondary support chain model D



Automatic drum lock to secure load even if tension drops suddenly

**STANDARD DUTY STEEL CAST TOOL BALANCER 1-15 LBS**

Part No.	Part No.	Weight capacity lbs	Cable length ft.
No ratchet	ratchet lock		
51.1405	51.2405	1 - 5	8
51.1410	51.2410	4 - 10	8
51.1415	51.2415	8 - 15	8



**Features**

- Durable cable easy to replace
- Easy tension adjustment
- Steel aircraft cable of 3/32" dia.
- High-impact steel case
- Optional ratchet lock allows cable locking at desired position
- Use secondary support chain model B



### *Ergonomics improves productivity*






Load is secured by automatic drum lock even if tension drops suddenly

### STANDARD DUTY CAST ALUMINUM TOOL BALANCER 18 - 60 LBS

#### Features

- Cast aluminum construction
- Easy steel cable replacement without disassembly
- Load is secured by automatic drum lock even if tension drops suddenly
- Full range of motion with 360° swivel hanger
- Optional ratchet lock allows cable locking at desired position
- Use secondary support chain model C

Part No. no ratchet	Part No. with ratchet	Weight capacity lbs	Cable length ft.
51.1525	51.2525	18 - 25	6.6
51.1535	51.2535	25 - 35	6.6
51.1545	51.2545	35 - 45	6.6
51.1560	51.2560	45 - 60	4.9

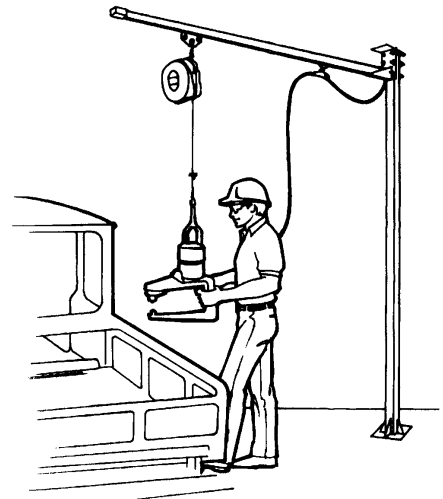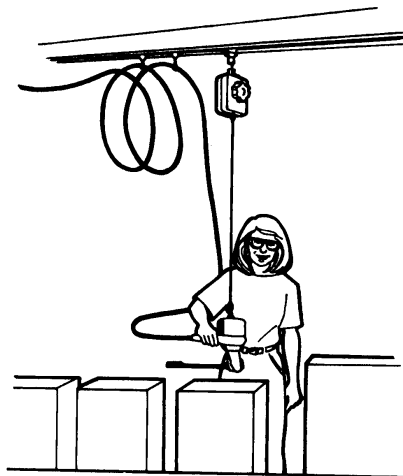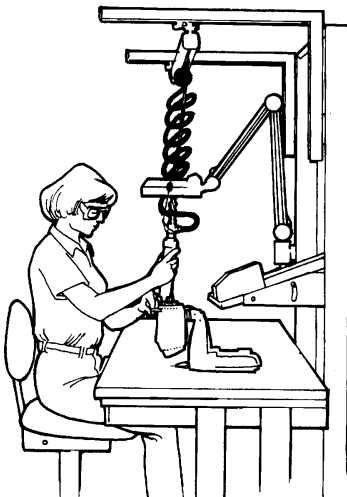

**For any questions  
 or information about  
 compressed air  
 you may contact us at  
 Tel. : 1-888-730-0501  
 Fax : 1-888-730-3522  
 or visit our web site at  
[www.airmax.ca](http://www.airmax.ca)**

## HEAVY DUTY CAST ALUMINUM TOOL BALANCER 80 - 200 LBS

Part No.	Weight capacity lbs	Cable length ft.
51.1815	85 - 115	7
51.1825	115 - 125	7
51.1835	125 - 135	7
51.1845	135 - 145	7
51.1855	145 - 155	7
51.1865	155 - 165	7
51.1875	160 - 175	7
51.1888	175 - 195	7
51.1890	190 - 200	7
51.1892	80 - 110	9
51.1894	115 - 125	9
51.1896	125 - 130	9
51.1898	145 - 200	9

### Features

- Extra durability with high tensile strength cast aluminum
- Premature failure is prevented by a Wear-Guard coated drum that protects the cable and drum
- Quick and easy tool changes with manual drum lock
- Load is secured by automatic drum lock even if tension drops suddenly
- Full range of motion with 360° swivel hanger
- Use secondary support chain model C



Load is secured by automatic drum lock even if tension drops suddenly

## HEAVY DUTY CAST ALUMINUM TOOL BALANCER 155 - 300 LBS

Part No.	Weight capacity lbs	Cable length ft.
51.1910	175 - 210	7
51.1935	210 - 235	7
51.1950	235 - 250	7
51.1965	250 - 265	7
51.1980	265 - 280	7
51.1990	280 - 290	7
51.1991	290 - 300	7
51.1992	155 - 165	9
51.1993	180 - 190	9
51.1994	200 - 210	9
51.1995	210 - 215	9

### Features

- Long life and trouble-free service with cast aluminum construction
- Premature failure is prevented by a Wear-Guard coated drum that protects the cable and drum from excessive wear
- Quick and easy tool changes with manual drum lock
- Load is secured by automatic drum lock even if tension drops suddenly
- 3/16" steel cable diameter
- Full range of motion with 360° swivel hanger
- Use secondary support chain model C




Load is secured by automatic drum lock even if tension drops suddenly

## TORQUE REELS FOR PENDANT STATIONS

Part No.	Weight capacity lbs	Cable length ft.
51.4110	15	15
51.4120	15	15
51.4130	15	15
51.4140	15	20
51.4150	20	20
51.4160	20	40
51.4170	30	20
51.4180	30	40

### Features

- Ideal for suspending push-button pendant stations for overhead hoists and cranes or similar equipment
- Weight capacity from 15 to 30 lbs
- Cable length from 15 to 40 feet
- Easy load height adjustment; a slight pull on the cable releases the lock mechanism
- Provides constant tension when desired, simply by using a convenient off switch to disengage lock
- Use secondary support chain model C



51.4110

51.4120

