


**MALE HEX  
PIPE NIPPLE**

Part No.	Thread (M) NPT in.	Thread (M) NPT in.
33.1110	1/8	1/8
33.1126	1/4	1/8
33.1128 *	1/4	1/4
33.1142	3/8	1/8
33.1144 *	3/8	1/4
33.1145	1/2	1/4
33.1146 * †	3/8	3/8
33.1152 *	1/2	3/8
33.1154 * †	1/2	1/2
33.1170	3/4	1/2
33.1172 †	3/4	3/4
33.1182 †	1	1



**MALE  
ADAPTER  
NPS/NPT**

Part No.	Thread (M) NPS in.	Thread (M) NPT in.
33.1526 *	1/4	1/8
33.1528	1/4	1/4
33.1544	3/8	1/4
33.1546	3/8	3/8
33.1548 *	3/8	1/2
33.1554	1/2	1/2



**Applications**

- Ideal for compressed air, water or vacuum


**Features**

- One piece solid brass construction
- For use with copper, brass, steel or plastic tubing

**Specifications**


**Maximum Working Pressure**  
300 PSI

**Working Temperature**  
-54°C to 121°C [-65°F to 250°F]




**LONG PIPE  
NIPPLE**

Part No.	Thread (M) NPT in.	Length in.
33.1210	1/8	1 1/2
33.1212	1/8	2
33.1214	1/8	2 1/2
33.1216	1/8	3
33.1218	1/8	3 1/2
33.1220	1/8	4
33.1222	1/4	1 1/2
33.1224	1/4	2
33.1226	1/4	2 1/2
33.1228	1/4	3
33.1230	1/4	3 1/2
33.1232	1/4	4
33.1234	3/8	1 1/2
33.1236	3/8	2
33.1238	3/8	2 1/2
33.1240	1/2	1 1/2
33.1242	1/2	2
33.1244	3/4	1 1/2
33.1246	3/4	2
33.1248	3/4	3 1/2




**FEMALE  
HEXAGONAL  
NIPPLE**

Part No.	Thread (F) NPT in.	Thread (F) NPT in.
33.1710 *	1/8	1/8
33.1726	1/4	1/8
33.1728 * †	1/4	1/4
33.1742	3/8	1/8
33.1744	3/8	1/4
33.1746 †	3/8	3/8
33.1750	1/2	1/4
33.1752	1/2	3/8
33.1754 †	1/2	1/2
33.1772 †	3/4	3/4
33.1782	1	1




**FEMALE TO  
MALE PIPE  
ADAPTER**

Part No.	Thread (M) NPT in.	Thread (F) NPT in.
33.1910	1/8	1/8
33.1912	1/8	1/4
33.1913	1/8	3/8
33.1928	1/4	1/4
33.1932 *	1/4	3/8
33.1933 *	1/4	1/2
33.1946	3/8	3/8
33.1948	3/8	1/2
33.1954	1/2	1/2
33.1958	1/2	3/4



**CLOSE NIPPLE**

Part No.	Thread (M) NPT in.
33.1310	1/8
33.1328	1/4
33.1346	3/8
33.1354	1/2
33.1372	3/4




**REDUCING  
BUSHING**

Part No.	Thread (M) NPT in.	Thread (F) NPT in.
33.1826 †	1/4	1/8
33.1842	3/8	1/8
33.1844 †	3/8	1/4
33.1849	1/2	1/8
33.1850 †	1/2	1/4
33.1852 †	1/2	3/8
33.1864 †	3/4	1/4
33.1866 †	3/4	3/8
33.1870 †	3/4	1/2
33.1874 †	1	1/4
33.1876 †	1	3/8
33.1878 †	1	1/2
33.1880 †	1	3/4


† AVAILABLE IN STAINLESS STEEL

\* AVAILABLE CARDED




**HEX HEAD  
PIPE PLUG**

Part No.	Thread (M) NPT in.
33.2110	1/8
33.2128	1/4
33.2146 *	3/8
33.2154 *	1/2
33.2172	3/4
33.2182	1




**SQUARE HEAD  
PIPE PLUG**

Part No.	Thread (M) NPT in.
33.2210	1/8
33.2228	1/4
33.2246	3/8
33.2254	1/2
33.2272	3/4
33.2282	1




**COUNTERSUCK  
HEX HEAD PIPE  
PLUG**

Part No.	Thread (M) NPT in.
33.2310 *	1/8
33.2328 *	1/4
33.2346 *	3/8
33.2354 *	1/2




**FEMALE  
ELBOW 90°**

Part No.	Thread (F) NPT in.
33.2410 * †	1/8
33.2428 * †	1/4
33.2446 * †	3/8
33.2454 * †	1/2
33.2472 †	3/4




**MALE-FEMALE  
STREET ELBOW  
90°**

Part No.	Thread (M) NPT in.	Thread (F) NPT in.
33.2610 †	1/8	1/8
33.2628 †	1/4	1/4
33.2646 †	3/8	3/8
33.2654 †	1/2	1/2
33.2672 †	3/4	3/4




**MALE  
ELBOW 90°**

Part No.	Thread (M) NPT in.	Thread (M) NPT in.
33.2810	1/8	1/8
33.2826	1/4	1/8
33.2828	1/4	1/4
33.2844	3/8	1/4
33.2846	3/8	3/8
33.2852	1/2	3/8
33.2854	1/2	1/2




**MALE/FEMALE  
STREET ELBOW  
45°**

Part No.	Thread (M) NPT in.	Thread (F) NPT in.
33.2910	1/8	1/8
33.2928	1/4	1/4
33.2946	3/8	3/8
33.2954	1/2	1/2




**FEMALE TEE**

Part No.	Thread (F) NPT in.
33.3110	1/8
33.3128 †	1/4
33.3146 †	3/8
33.3154 †	1/2
33.3172 †	3/4




**MALE  
BRANCH  
TEE**

Part No.	Thread (M) NPT in.	Thread (F) NPT in.
33.3310	1/8	1/8
33.3328	1/4	1/4
33.3346	3/8	3/8
33.3354	1/2	1/2




**STREET TEE**

Part No.	Thread (M) NPT in.	Thread (F) NPT in.
33.3410	1/8	1/8
33.3428	1/4	1/4
33.3446	3/8	3/8



**MALE PIPE TEE**

Part No.	Thread (M) NPT in.
33.3610	1/8
33.3628	1/4
33.3646	3/8
33.3654	1/2






**CROSS**


Part No.	Thread (F) NPT in.
33.3710	1/8
33.3728	1/4
33.3746	3/8
33.3754	1/2

† AVAILABLE IN STAINLESS STEEL

\* AVAILABLE CARDED

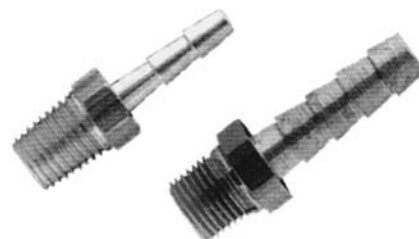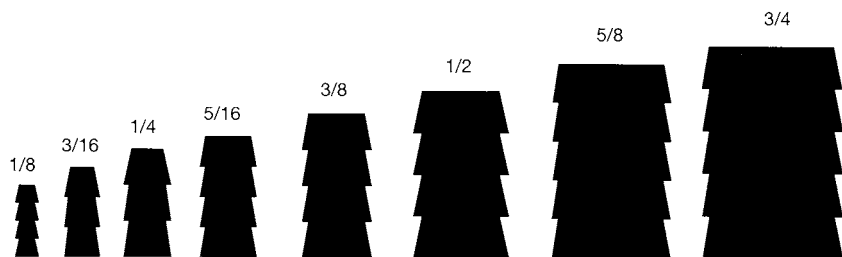


**HOSE BARB TO MALE PIPE CONNECTOR**



**HOSE BARB TO FEMALE PIPE CONNECTOR**

Part No.	Hose I.D. in.	Thread (M) NPT in.
33.4110 †	1/8	1/8
33.4112	1/8	1/4
33.4120 †	3/16	1/8
33.4124 †	3/16	1/4
33.4126 * †	1/4	1/8
33.4128 * †	1/4	1/4
33.4132 †	1/4	3/8
33.4134 †	5/16	1/8
33.4136 * †	5/16	1/4
33.4140 †	5/16	3/8
33.4142 †	3/8	1/8
33.4144 * †	3/8	1/4
33.4146 * †	3/8	3/8
33.4148 †	3/8	1/2
33.4150 * †	1/2	1/4
33.4152 * †	1/2	3/8
33.4154 * †	1/2	1/2
33.4158 †	1/2	3/4
33.4160 †	5/8	3/8
33.4162 †	5/8	1/2
33.4166 †	5/8	3/4
33.4170 †	3/4	1/2
33.4172 †	3/4	3/4
33.4180 †	1	3/4
33.4182	1	1

Part No.	Hose I.D. in.	Thread (F) NPT in.
33.4310	1/8	1/8
33.4312	1/8	1/4
33.4320	3/16	1/8
33.4324	3/16	1/4
33.4326	1/4	1/8
33.4328 * †	1/4	1/4
33.4332	1/4	3/8
33.4334	5/16	1/8
33.4336	5/16	1/4
33.4340	5/16	3/8
33.4342	3/8	1/8
33.4344 * †	3/8	1/4
33.4346 * †	3/8	3/8
33.4348	3/8	1/2
33.4350	1/2	1/4
33.4352	1/2	3/8
33.4354 †	1/2	1/2
33.4372	3/4	3/4



**HOSE BARB TO FEMALE SAE FLARE**

Part No.	Hose I.D. in.	Thread (F) SAE in.
33.4524	3/16	1/4
33.4528	1/4	1/4
33.4530	1/4	5/16
33.4532	1/4	3/8
33.4538	5/16	5/16
33.4540	5/16	3/8
33.4546	3/8	3/8
33.4548	3/8	1/2
33.4554	1/2	1/2
33.4556	1/2	5/8

## Applications

- Ideal for compressed air, water or gas

## Features

- For use with natural or synthetic rubber hoses


## Specifications

### Maximum Working Pressure

150 PSI


### Working Temperature

-40°C to 71°C (-40°F to 160°F)




**HOSE BARB SPLICER**

Part No.	Hose I.D. in.
33.4722	3/16
33.4728 * †	1/4
33.4738 *	5/16
33.4746 * †	3/8
33.4754 * †	1/2

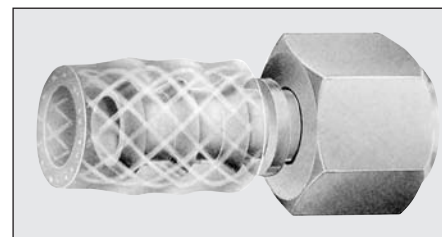


† AVAILABLE IN STAINLESS STEEL

\* AVAILABLE CARDED




**HOSE BARB TO FEMALE PIPE (2 PCS) CONNECTOR**

Part No.	Hose I.D. in.	Thread (F) NPT in.
33.4910	1/8	1/8
33.4920	3/16	1/8
33.4924	3/16	1/4
33.4926	1/4	1/8
33.4928	1/4	1/4
33.4932	1/4	3/8
33.4936	5/16	1/4
33.4944	3/8	1/4
33.4946	3/8	3/8
33.4948	3/8	1/2
33.4952	1/2	3/8
33.4954	1/2	1/2



**HOSE BARB TO MALE PIPE 90° ELBOW**

Part No.	Hose I.D. in.	Thread (M) NPT in.
33.5126	1/4	1/8
33.5128	1/4	1/4
33.5142	3/8	1/8
33.5144	3/8	1/4



**HOSE BARB TO MALE PIPE 45° ELBOW**

Part No.	Hose I.D. in.	Thread (M) NPT in.
33.5226	1/4	1/8
33.5234	5/16	1/8
33.5242	3/8	1/8
33.5244	3/8	1/4
33.5246	3/8	3/8




**REUSABLE HOSE BARB TO MALE CONNECTOR**

Part No.	Hose I.D. in.	Hose O.D. in.	Thread (M) NPT in.
33.5540	1/4	1/2	1/4
33.5542	1/4	9/16	1/4
33.5544	1/4	5/8	1/4
33.5546	1/4	11/16	1/4
33.5548	1/4	1/2	1/4
33.5550	5/16	9/16	1/4
33.5552	5/16	5/8	1/4
33.5554	5/16	11/16	1/4
33.5560	3/8	5/8	1/4
33.5562	3/8	11/16	1/4
33.5568	3/8	5/8	3/8
33.5570	3/8	11/16	3/8
33.5572	3/8	3/4	3/8
33.5580	1/2	7/8	1/2
33.5582	1/2	15/16	1/2
33.5584	1/2	1	1/2



**REUSABLE HOSE SPLICER**

Part No.	Hose I.D. in.	Hose O.D. in.
33.5640	1/4"	1/2"
33.5642	1/4"	9/16"
33.5644	1/4"	5/8"
33.5660	3/8"	5/8"
33.5662	3/8"	11/16"
33.5664	3/8"	3/4"



**STANDARD HOSE FERRULE**

Part No.	I.D. in.	Hole Size in.
33.5912	.375	.265
33.5914	.400	.265
33.5916	.425	.265
33.5918	.450	.328
33.5920	.475	.328
33.5922	.500	.328
33.5924	.525	.406
33.5926	.550	.406
33.5928	.575	.406
33.5930	.600	.453
33.5932	.625	.453
33.5934	.650	.453
33.5936	.675	.500
33.5938	.700	.500
33.5940	.725	.500
33.5942	.750	.500
33.5944	.775	.593
33.5946	.800	.593
33.5948	.825	.687
33.5950	.850	.687
33.5952	.875	.750
33.5954	.900	.750
33.5956	.925	.750
33.5958	.950	.750





**MANUAL CRIMPER**

Part No.	Approx. Die I.D.
33.5900	.630 in.
---	.580 in.
---	.530 in.
---	.480 in.
---	.680 in.


◆ AVAILABLE IN STAINLESS STEEL

\* AVAILABLE CARDED

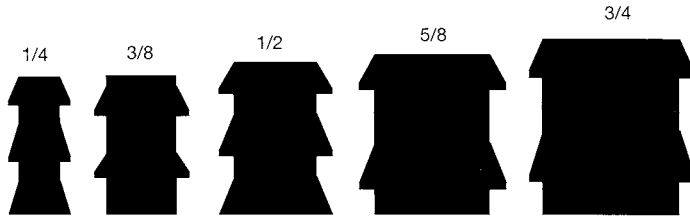


**HOSE BARB  
PUSH-ON  
TO FEMALE  
CONNECTOR**

Part No.	Hose I.D. in.	Thread (F) NPT in.
33.6126	1/4	1/8
33.6128	1/4	1/4
33.6144	3/8	1/4
33.6146	3/8	3/8
33.6152	1/2	3/8
33.6154	1/2	1/2
33.6162	5/8	1/2
33.6172	3/4	3/4




**HOSE BARB  
PUSH-ON TO  
FEMALE SAE  
(SWIVEL)**

Part No.	Hose I.D. in.	Thread (F) SAE in.
33.6428	1/4	1/4
33.6430	1/4	5/16
33.6446	3/8	3/8
33.6454	1/2	1/2
33.6464	5/8	5/8
33.6472	3/4	3/4



**HOSE BARB  
PUSH-ON  
TO MALE  
CONNECTOR**

Part No.	Hose I.D. in.	Thread (M) NPT in.
33.6226 †	1/4	1/8
33.6228 †	1/4	1/4
33.6244 †	3/8	1/4
33.6246 †	3/8	3/8
33.6248	3/8	1/2
33.6252 †	1/2	3/8
33.6254 †	1/2	1/2
33.6262	5/8	1/2
33.6272 †	3/4	3/4
33.6282	1	1



**PUSH-ON  
HOSE  
MENDER**

Part No.	Hose I.D. in.
33.6828 †	1/4
33.6846 †	3/8
33.6854 †	1/2
33.6864	5/8
33.6872	3/4

## Applications

- Ideal for compressed air, gas or lubrication lines


## Features

- To be used with "lock-on" hose (Series 49)
- Easy to install and reusable


## Specifications

**Maximum Working Pressure**  
250 PSI

**Working Temperature**  
-40°C to 93°C (-40°F to 200°F)

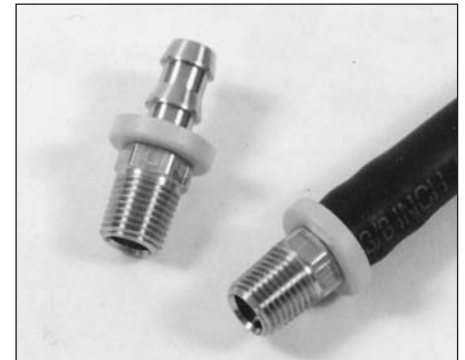

**For any questions or information about compressed air you may contact us at  
Tel. : 1-888-730-0501 - Fax : 1-888-730-3522  
or visit our web site at [www.airmax.ca](http://www.airmax.ca)**

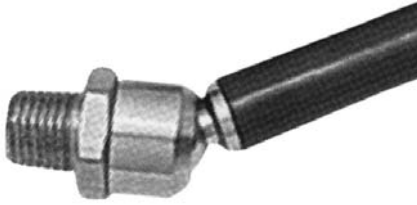

### Applications

- Ideal for compressed air, water or gas

### Features

- For use with natural or synthetic rubber hoses


### Specifications

#### Maximum Working Pressure

150 PSI


#### Working Temperature

-40°C to 71°C (-40°F to 160°F)




### HOSE BARB TO MALE PIPE CONNECTOR (SWIVEL)

Part No.	Hose I.D. in.	Thread (M) NPT in.
33.7128	1/4	1/4
33.7134	5/16	1/4
33.7144	3/8	1/4
33.7146 *	3/8	3/8
33.7154	1/2	1/2



### SWIVEL ELBOW TO MALE PIPE

Part No.	Thread (M) NPT in.	Thread (M) NPT in.
33.7528	1/4	1/4



### HOSE BARB TO FEMALE PIPE CONNECTOR (SWIVEL)

Part No.	Hose I.D. in.	Thread (F) NPT in.
33.7228	1/4	1/4
33.7234	5/16	1/4
33.7244	3/8	1/4
33.7246	3/8	3/8
33.7254	1/2	1/2



### HOSE BARB TO MALE PIPE CONNECTOR (BALL SWIVEL)

Part No.	Hose I.D. in.	Thread (M) NPT in.
33.7628	1/4	1/4
33.7634	5/16	1/4
33.7644	3/8	1/4



### FEMALE TO MALE PIPE CONNECTOR (BALL SWIVEL)

Part No.	Thread (F) NPT in.	Thread (M) NPT in.
33.7728	1/4	1/4



### 90° SWIVEL ELBOW TO FEMALE PIPE

Part No.	Thread (M) NPT in.	Thread (F) NPT in.
33.7428	1/4	1/4



### HEAD PLUG (BALL SWIVEL)

Part No.	Thread (M) NPT in.	Coupler Type
33.7816	1/4	I-1 (1/4" Industrial)
33.7817	1/4	A-1 (1/4" Aro)
33.7818	1/4	T-1 (1/4" Tru-Flate)



### TEFLON ROLL

Part No.	Description
33.9080 *	1/2" X 40 feet.
<b>NEW</b>	
33.9085	1/2" pink



### LIQUID TEFLON

Part No.	Description
33.9090	50 ml Liquid Teflon

\* AVAILABLE CARDED